Aluminium UNI-rivet


Product Information Sheet

Rivet for fixing all EQUITONE cladding boards [linea], [tectiva], [materia], [natura], [pictura], [textura] on a metal supporting structure.

ARTICLE NUMBER: **rivet: according colour – fixed point cylinder: 4057579**

TECHNICAL CHARACTERISTICS



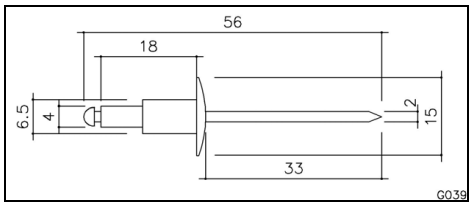


Rivet


Dimensions:	diameter = 4.0 mm length = 18 mm grip range = 8-13 mm head diameter = 15 mm diameter mandrel = 2.0 mm
Material:	head/body: aluminium AlMg5 mandrel: stainless steel quality A2 (1.4541)
Coating:	same colour as the board
Tensile strength:	1.900 kN
Shear strength:	1.120 kN

Sleeve (green)

Dimensions	outer diameter = 6.5 mm inner diameter = 4.1 mm length = 10.2 mm
Material	nylon



Fixed point cylinder (red)



Dimensions:	outer diameter = 10.9 mm inner diameter = 6.6 mm length = 10.2 mm
Material:	nylon

PACKAGING

Packaging:	rivet:	250 pieces per box
	fixed point cylinder:	100 pieces per box

PROCESSING

Consult the EQUITONE application guidelines for metal sub-construction

This product information sheet replaces any previous editions. ETERNIT reserves the right to amend this information sheet without prior notice. Readers should always satisfy themselves that they are referring to the most recent version of this document. No part of this text can be changed without permission of ETERNIT.

Eternit NV, Cladding department
Kuiermansstraat 1
B-1880 Kapelle-op-den-Bos
Belgium
Tel +32 (0)15 71 74 43
Fax +32 (0)15 71 74 49
info.gevel@eternit.be
www.eternit.be

RPR 0 466 059 066, Brussels – VAT BE 0 466 059 066 – Account 482-9098061-09